







ENERGY-SAVING TOWER UPS



Energy-saving UPS systems save up to 93% of power consumption


Designed for home and office applications, the UT Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The patented GreenPower UPS™ Bypass design achieves ultra-low power consumption to reduce energy costs. The LED indicator shows the utility, battery and operating status of the UPS. Other features include overload protection, EMI filter and configurable alarm to safeguard your devices.

SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Automatic Voltage Regulation (AVR)
- Generator Compatible
- LED Status Indicator
- Overload Protection
- Phone/Fax/Modem/DSL/Network Protection
- High-speed Ethernet Data Transmission
- USB Connectivity Port
- PowerPanel® Management Software
- Configurable Alarm
- EMI and RFI Filtration

PRODUCT CALLOUTS

1. Power On/Off Switch
2. LED Status Indicators
3. USB Port
4. Battery Backup Outlets
5. Input Circuit Breaker
6. Communication Protection Ports RJ11/RJ45
7. AC Input Power Cord

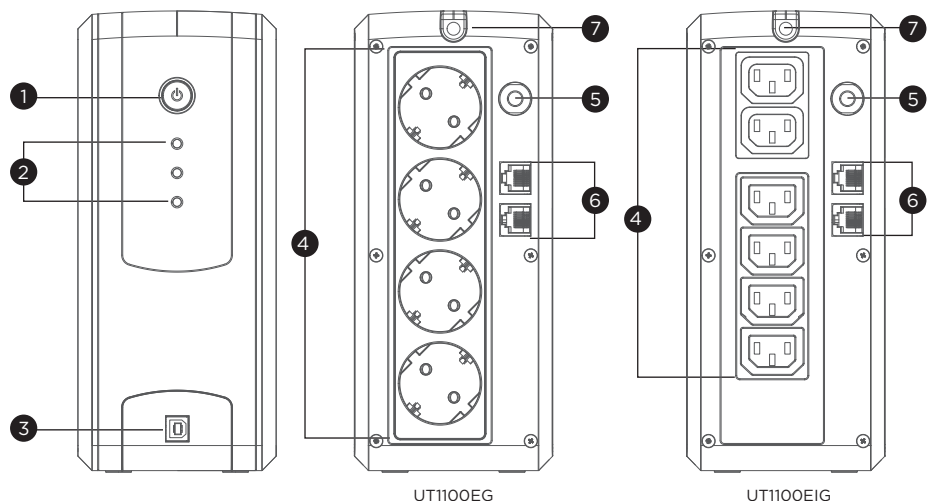



TECHNICAL SPECIFICATIONS

Model Name	UT1100EG	UT1100EIG
General		
UPS Topology	Line-interactive	
Energy Saving Technology	GreenPower UPS™ Bypass Technology	
Input		
Generator Compatibility	Yes	
Nominal Input Voltage (Vac)	230 ± 10%	
Input Voltage Range (Vac)	165 - 290	
Input Frequency (Hz)	50 ± 5, 60 ± 5	
Input Frequency Detection	Auto-sensing	
Rated Input Current (A)	4.56	
Input Connector Type	Schuko	
Output		
Capacity (VA)	1100	
Capacity (Watts)	660	
On Battery Waveform	Simulated Sine Wave	
On Battery Voltage(s) (Vac)	230 ± 10%	
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%	
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck	
Overload Protection	Circuit Breaker	
Outlet(s) - Total	4	6
Outlet Type	Schuko x 4	IEC C13 x 6
Outlet(s) - Battery Backup	4	6
Typical Transfer Time (ms)	4	
Battery		
Runtime at 60W (min)	65	
Runtime at 90W (min)	45	
Runtime at 200W (min)	14	
Typical Recharge Time (Hours)	6	
User-replaceable	No	
Battery Type	Sealed Lead-acid	
Replacement Battery Pack	RBPO119	
RBP Quantity (pcs)	2	
Surge Protection & Filtering		
EMI/RFI Filtration	Yes	
Phone/Network Protection RJ11/RJ45 (Combo)	1-in, 1-out	
Management & Communications		
LED Indicators	Power On, Line Mode, Battery Mode, Bypass Mode, Low Battery, Overload, UPS Fault	
HID Compliant USB Port(s)	1	
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault	
Ethernet Data Transmission Speed	Up to 1Gbps	
Power Management Software	PowerPanel® Personal (Recommended)	
Physical		
Form Factor	Tower	
Physical Size - UPS Module		
Dimensions (WxHxD) (mm.)	95 x 220 x 307	94 x 220 x 307
Weight (kg.)	6.9	
Environmental		
Operating Temperature (°C)	0 - 40	
Operating Relative Humidity (Non-condensing) (%)	0 - 90	
Online Thermal Dissipation (BTU/hr)	27	
Certifications		
Certifications*	CE, EAC	
RoHS	Yes	

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
 #All specifications are subject to change without notice.

